



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

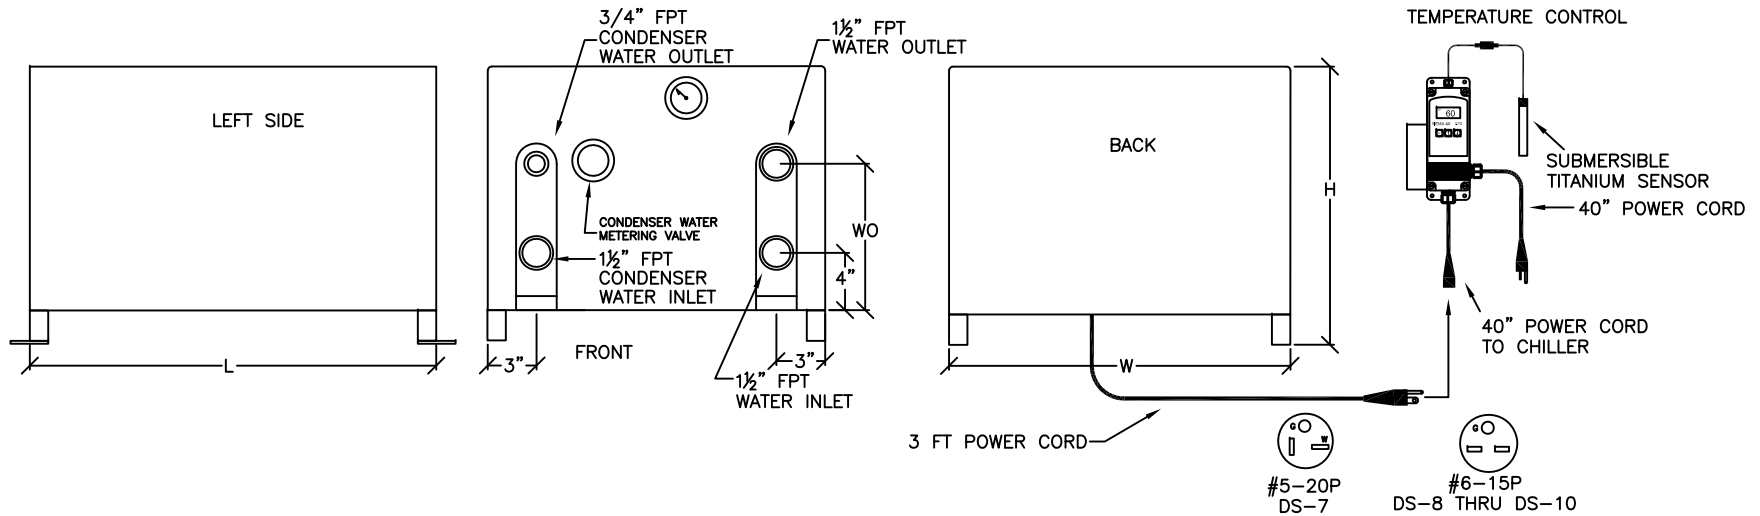

CHILLER SPECIFICATIONS

MODEL NO.	HP / TONS	NOMINAL BTUH	VOLTS / PHASE	AMPS.	WATTS	L	W	H	WO	REFRIGERANT TYPE/CHARGE	*CONDENSER WATER FLOW (GPM)	EVAPORATOR WATER FLOW (GPM)	WEIGHT (LBS.)	SHIPPING WEIGHT (LBS.)	SHIPPING DIMENSIONS (INCHES)
DSHP-7WC-MD	3/4	9500	115	13	1495	20"	20"	17.2"	9"	R134A / 2 Lbs. 6 oz	5-10	15-30	112	150	33x26x23
DSHP-8WC-MD	3/4	9500	230/1	7	1610	26"	20"	17.2"	9"	R134A / 2 Lbs. 6 oz	5-10	15-30	112	150	33x26x23
DSHP-9WC-MD	1	12,000	230/1	7.2	1656	26"	20"	17.2"	9"	R134A / 3 Lbs.	5-10	20-35	117	160	33x26x23
DSHP-10WC-MD	1 1/2	21,000	230/1	10.5	2415	31"	26"	19"	12"	R-417A / 4 Lbs.	10-15	25-40	147	250	36x33x24

\* SEAWATER USE IS BASED ON 55-60°F WATER TEMPERATURE ENTERING THE THE CONDENSER. WATER FLOW TO CONDENSER IS METERED VIA GATE VALVE.  
 ALL DIMENSIONS ARE APPROXIMATE AND CAN CHANGE WITHOUT NOTICE

TITLE	DELTA STAR HEAT PUMP WATER-COOLED MARINE DUTY MODELS DSHP-7-WCMD THRU DSHP-10-WCMD	PROJECT	AQUA LOGIC	FILE	C:\AutoCad Files\DS & CY Chillers\DS-WC\DSHP-7, 8, 9 & 10-WCMD Spec.dwg	DRAWING NO	00	EDITED	1/12/2016	SCALE	1:1	 AQUA LOGIC, INC 9558 CAMINO RUIZ, SAN DIEGO, CA. 92126
	CLIENT	AQUA LOGIC	DRAWN BY			CEPPS	CREATED	2/2/2007	PAGE	1 of 1		