



TLD-3 THRU TLD-4 CHILLER SPECIFICATION

FOR INDOOR FRESH AND SALT WATER APPLICATIONS

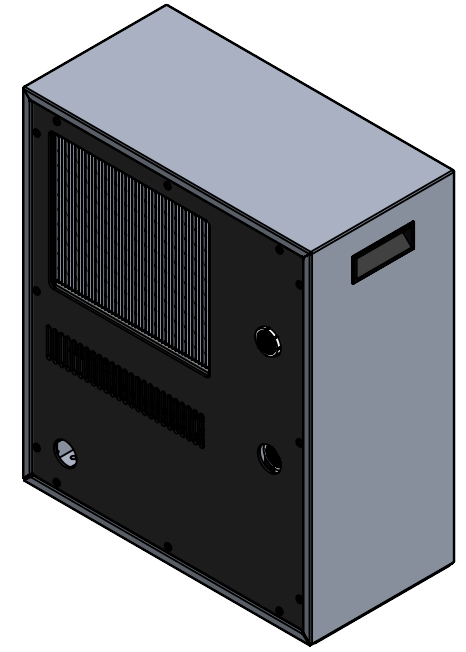

POWER CORD
PLUG TYPE

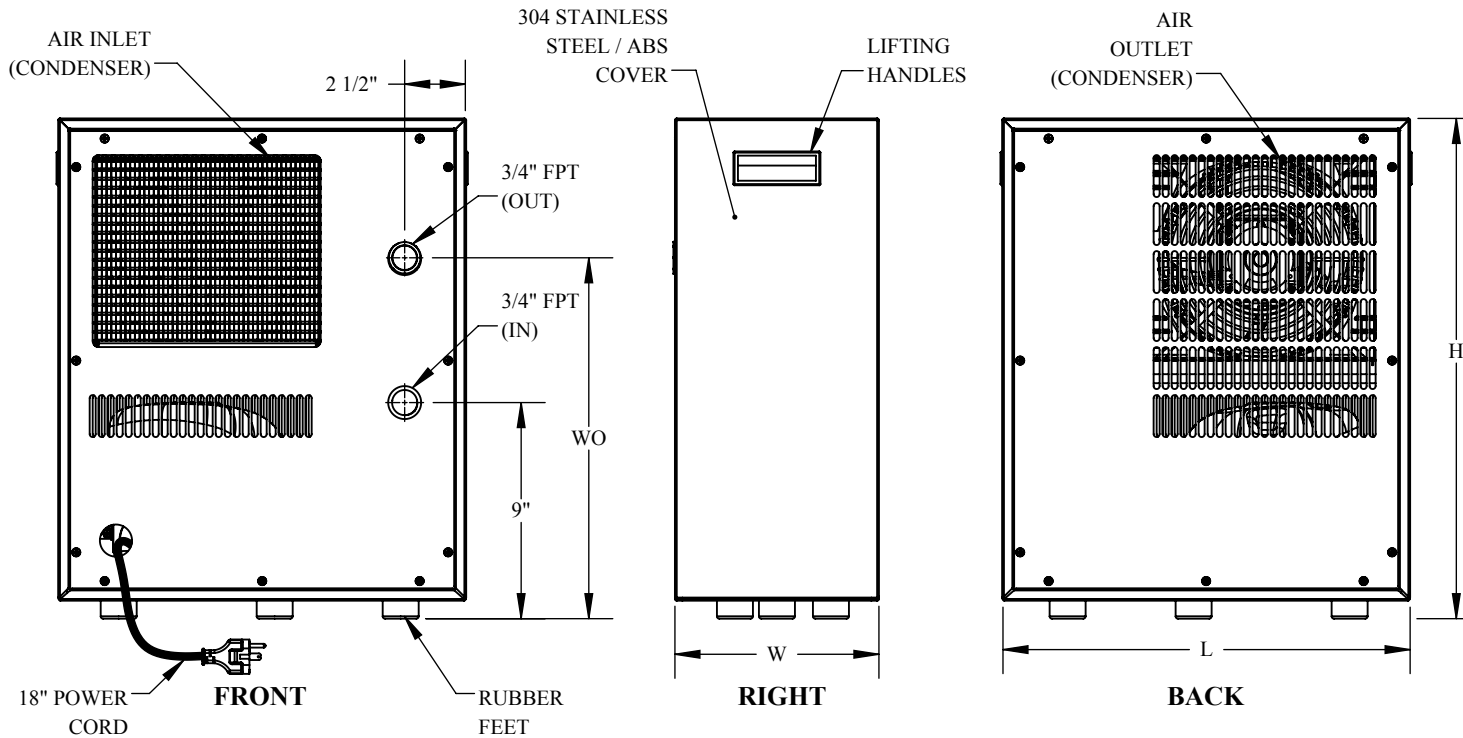

#5-15P

WO: WATER OUTLET

CHILLER SPECIFICATIONS														
MODEL NO.	HP	NOMINAL BTUH	R134A REFRIGERANT CHARGE (OZ.)	VOLTS	AMPS.	WATTS	WATER FLOW RATE (GPM)	AIR OUTPUT (CFM)	L	W	H	WO	SHIPPING WEIGHT (LBS.)	SHIPPING DIMENSIONS (IN.)
TLD-3	1/4	3,000	5	115	5.4	621	8-15	240	17"	8 1/2"	20 1/2"	15"	53	25x15x31
TLD-4	1/3	4,000	8	115	7.2	828	10-20	260	19"	9"	21"	16 1/2"	62	25x15x31

NOTE:

- STANDARD MODEL CHILLERS OPERATE WITHIN A TEMPERATURE RANGE OF 65-80°F.
- ADD "CWCT" (COLD WATER CAP TUBE) TO MODEL NUMBER FOR WATER TEMPERATURES BETWEEN 50-65°F.
- ALL DIMENSIONS ARE APPROXIMATE AND CAN CHANGE WITHOUT NOTICE.



9558 Camino Ruiz, San Diego, CA 92126

DRAWING #
PDF-0430

SHEET TITLE
TLD-3 THRU TLD-4
CHILLER
SPECIFICATION

* COPYRIGHT *
These drawings including design idea and construction techniques herein are the sole property of Aquo Logic Inc. They shall not be revised, copied, or reproduced in any manner without the written consent of Aquo Logic Inc.

DESCRIPTION
TRIMLINE DELTA STAR WATER CHILLERS

DRAWN BY

DATE

REVISION

SCALE

SHEET #

Arnaldo Guzman

11/12/2015

1 OF 1